

conveys the image

RADARserver

Light Edition




RADARserver LE is a professional grade radar conjunction box, providing radar signals on a standard network interface for easy access by navigation or surveillance software applications.

RADARserver LE is compatible with most X-band and S-band navigation and surveillance radars, since it is directly accessing analogue antenna signals. Standard

TCP/IP interface allows transmission of the received radar data. **RADARserver LE** has test and debug functionality integrated as well as remote surveillance and software configuration support. Appropriate software radar scan converter library **RADARlibrary** is available for Microsoft Windows XP™ and Linux operating system.

RADARserver LE is fully compatible and shares the core technology with **RADARserver**, its high performance variant for exceptionally demanding applications.

Sample configuration of the RADARserver LE

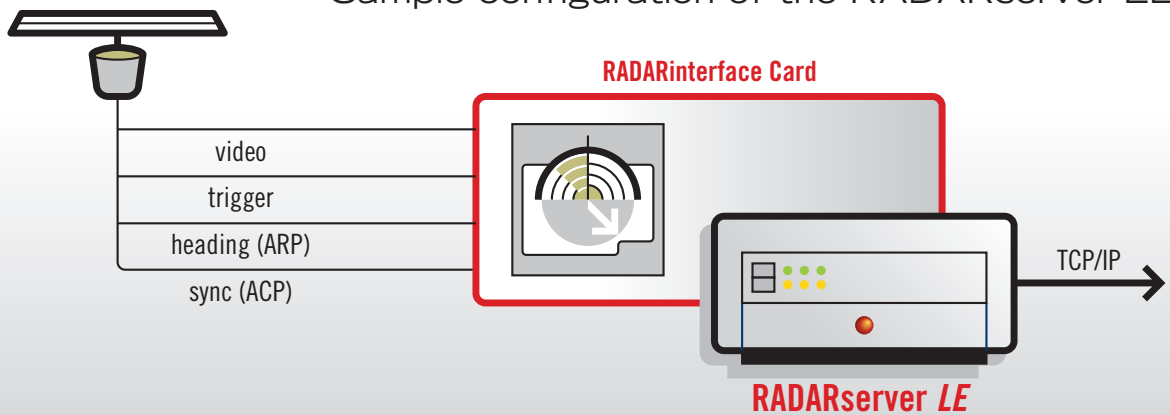

in SIGHT

Hardware



Highlights

- high performance analogue radar interface (up to 100 MHz sampling rate)
- 1500 pixels per beam
- multiple client support
- compression of data
- small, robust fan-less design
- filter functions integrated
- analogue radar interface (video, trigger, ACP, ARP)
- compatibility with many radar scanners
- Powersupply: 24 V DC, operation on 110/230 V AC with external adapter
- dimensions: 28 cm (length) x 22 cm (width) x 9 cm (height)



Further information about recent developments of innovative navigation systems can be found on the homepage: <http://www.innovative-navigation.de>

in-innovative navigation GmbH
 Leibnizstraße 11
 D-70806 Kornwestheim (Germany)
 phone: +49 (0) 7154 807 150
 fax: +49 (0) 7154 807 154
 email: info@innovative-navigation.de